



Ornato Elite Hybrid Waterproofing Flooring: Technical Specifications

• Type: Rigid Hybrid Floating Flooring

• Thickness: 6.0mm (1.5mm IXPE underlay)

• Size: 1511 x 229 x 6.0mm

• Surface Finish: UV Coating- Anti bacterial

• Edging: Micro-Bevelled Edge

• Profile: Unilin

• Installation Method: Floating

Pack Size: 2.08m2Pack weight: 20 kg

Applications: For use in interior areas of private homes and commercial establishments

Warranty: : 25 years for private use / 5 years for commercial use

• Boards per pack: 6

• VOC Rating: A+


• Wear Layer: 0.55mm

• Construction: Rigid Core; LVT balance layer; Cushion pad

Acoustics Rating: 5 Star AAAC

• Slip Resistance Classification: P2 AS4586-2013

 Australian Fire Reaction Floor: AS/ISO 9239-1:2003 CRF 7.0KW/m2

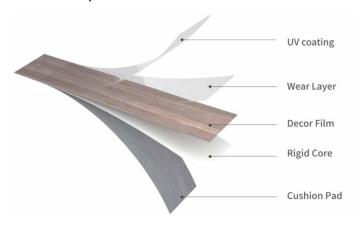

ELITE HYBRID COLLECTION 2021-2022

European Oak Collection Size 1511 x 229 x 6.0mm































RESISTANT

TOUCH

WOOD GRAIN MICRO BEVEL HYBRID CORE WATER PROOF

THICKNESS

0.55mm SURFACE WIDE PLANK QUITE UNDERFOOT MATCHING WEAR LAYER

ACCESSORIES

CLICK LOCK PROFILE

SPECIES

DOMESTIC

COMMERCIAL

ELITE HYBRID COLLECTION 2021-2022

Timber Collection Size 1511 x 229 x 6.0mm



































DOMESTIC COMMERCIAL WARRANTY

RESISTANT

TOUCH

FDGF

WOOD GRAIN MICRO BEVEL HYBRID CORE WATER PROOF

0.55mm SURFACE WIDE PLANK QUITE UNDERFOOT MATCHING THICKNESS WEAR LAYER

ACCESSORIES

CLICK LOCK PROFILE

AUSTRALIAN SPECIES PATTERNS









